

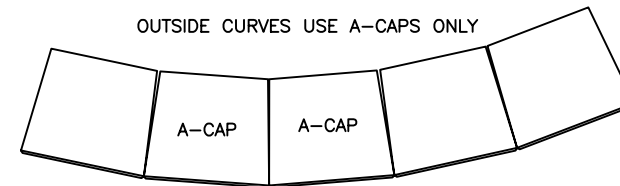


GENERAL NOTES FOR CAPPING:


1. CAPS SHALL BE ADHERED TO WALL USING VERSA-LOK CONCRETE ADHESIVE
2. CAPS MAY BE PLACED WITH A 1/2" TO 1" OVERHANG OF TOP COURSE
3. WHEN SPLITTING CAP UNIT FOR WALL END DO NOT USE A CAP SECTION LESS THAN 6" WIDE
4. DO NOT OVERHANG CAP AT END OF COURSE MORE THAN 1"

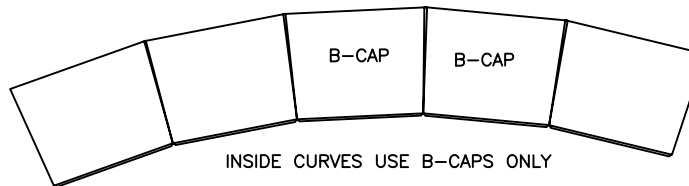

FOR STRAIGHT WALLS, ALTERNATE A-CAP AND B-CAP

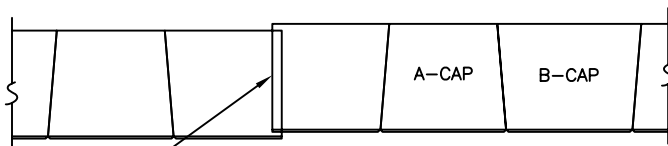


SPLIT EXPOSED SIDE

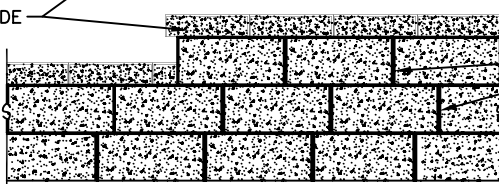

RANDOMLY STAGGER VERTICAL JOINTS


CAPPING DETAIL—PROFILE

STEP AT TOP OF WALL
SCALE: NONE



CAPPING DETAIL—PLAN VIEW

CURVES
SCALE: NONE

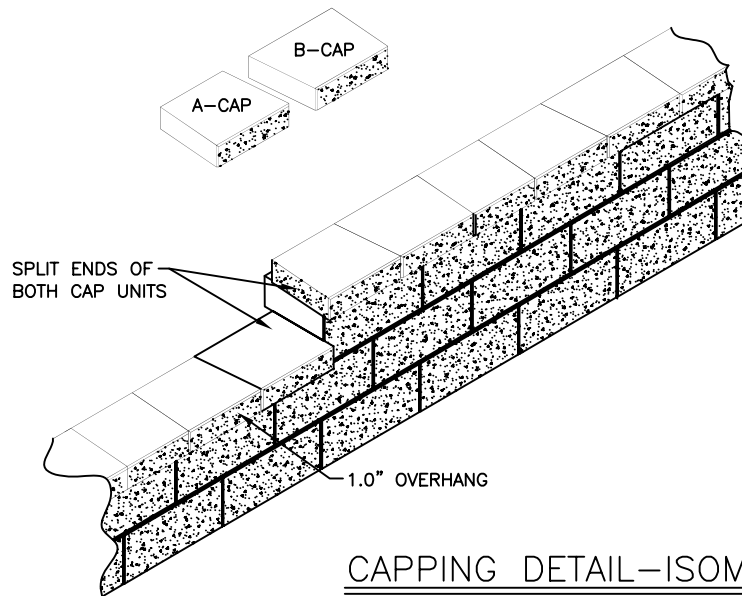

CAPPING DETAIL—ISOMETRIC

STEP AT TOP OF WALL
SCALE: NONE

NOT FOR CONSTRUCTION

THESE PRELIMINARY DETAILS ARE INTENDED AS AN AID IN DESIGNING ATTRACTIVE, DURABLE RETAINING WALLS WITH VERSA-LOK STANDARD UNITS. FINAL DETERMINATION OF THE SUITABILITY OF ANY INFORMATION OR MATERIAL FOR THE USE CONTEMPLATED, AND ITS MANNER OF USE, IS THE SOLE RESPONSIBILITY OF THE USER. A FINAL PROJECT SPECIFIC DESIGN SHOULD BE PREPARED BY A QUALIFIED, LICENSED, PROFESSIONAL ENGINEER.



VERSA-LOK®
Retaining Wall Systems
Solid Solutions™
(800)770-4525 fax(651)770-4089
6348 Hwy36 Ste1, Oakdale,MN 55128

SQUARE FOOT DETAILS

CAPPING

SCALE: AS NOTED

DRAWN BY: PPS

CHECKED BY:

DATE: 10/04

DWG. NO. sf capping